




LED Music Controller

Product Description

Wireless 6-key full-touch music synchronization controller is an LED controller with advanced point touch technology. There are five types of lamps, including control of monochrome, color temperature, RGB, RGBW, and RGBWC; gradient, jump, fading, flashing, flashing, music mode dynamic lighting and static colors. Can be widely used in home decoration, shopping mall advertising, bar and other use of places. It has the advantages of flexible wiring, convenient wiring and simple use.

1.Model:YS-SK85-02

RF Wireless two-color temperature touch music controller

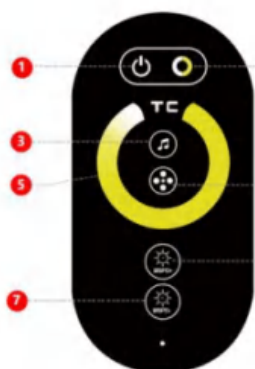

1. Start the key ;
2. Color temperature switch ;
3. Music mode ;
4. Dynamic mode ;
- 5, the color temperature touch ring ;
- 6, brightness / speed / music plus ;
- 7, brightness / speed / music reduction



1	White light / warm light / jump change	6	Warm light jump change	White light flash music
2	Warm light gradient	7	Neutral photohopping	Neutral light flash music
3	Neutral light gradient	8	White light jump change	Warm light flash music
4	White light gradient	9	White light / warm light / neutral light jump change	Cycle flash music
5	White light / warm light transition			

Performance Parameter

- Operating temperature: -20-60°C
- Power supply voltage: DC5V-24V
- Output: 6A * 2ch high power
- Connection mode: Gongyang
- Size of the controller: L85 * W45 * H23mm
- Remote control size: L113*W56*H22.5mm
- Plastic suction packaging size: L215 * W132 * H23mm
- Net weight: 92g
- Gross weight: 117g
- Static power consumption: <1W
- Output current: <18A
- Output power: 5V <90W, 12V: <216W, 24V: <432W



2.Model:YS-SK85-03

RF Wireless RGB touch music controller



1. Start the key
2. Static color
3. Music mode
4. Dynamic mode
- 5, the RGB touch ring
- 6, brightness / speed / music plus
- 7, brightness / speed / music reduction

RGB dynamic models



1	Red gradient	11	Red jump	20	Red flash	Gradient music
2	Green gradient	12	Green jump	21	Green flash	pop music
3	Blue gradient	13	Blue jump	22	Blue flash	Tender music
4	Yellow gradient	14	Yellow jump	23	Yellow flash	Flash music
5	Purple gradient	15	Purple jump	24	Purple flash	
6	Cyan gradient	16	Cyan jump	25	Cyan flash	
7	White gradient	17	White jump	26	White flash	
8	Three color gradient	18	Three color jump change	27	Three color flash	
9	Seven color gradient	19	Seven color jump change	28	Seven color flash	
10	Full color gradient					

Performance Parameter

- Operating temperature: -20-60°C
- Power supply voltage: DC5V-24V
- Output: 6A * 3ch high power
- Connection mode: Gongyang
- Size of the controller: L85 * W45 * H23mm
- Remote control size: L113*W56*H22.5mm
- Plastic suction packaging size: L215 * W132 * H23mm
- Net weight: 92g
- Gross weight: 117g
- Static power consumption: <1W
- Output current: <18A
- Output power: 5V <90W, 12V: <216W, 24V: <



3.Model:YS-SK85-04

RF Wireless RGBW Touch music controller



1. Start the key
2. Static color
3. Music mode
4. Dynamic mode
- 5, the RGB touch ring
- 6, brightness / speed / music plus
- 7, brightness / speed / music reduction

RGBW dynamic models

1	Red gradient	12	Red jump	22	Red flash	Gradient music
2	Green gradient	13	Green jump	23	Green flash	pop music
3	Blue gradient	14	Blue jump	24	Blue flash	Tender music
4	Yellow gradient	15	Yellow jump	25	Yellow flash	Flash music
5	Purple gradient	16	Purple jump	26	Purple flash	



6	Cyan gradient	17	Cyan jump	27	Cyan flash	
7	White gradient	18	White jump	28	White flash	
8	W gradual change	19	W saltus step	29	W stroboflash	
9	Three color gradient	20	Three color jump change	30	Three color flash	
10	Seven color gradient	21	Seven color jump change	31	Seven color flash	
11	Full color gradient					

Performance Parameter

- Operating temperature: -20-60°C
- Power supply voltage: DC5V-24V
- Output: 6A * 4ch high power
- Connection mode: Gongyang
- Size of the controller: L85 * W45 * H23mm
- Remote control size: L113*W56*H22.5mm
- Plastic suction packaging size: L215 * W132 * H23mm
- Net weight: 92g
- Gross weight: 117g
- Static power consumption: <1W
- Output current: <24A
- Output power: 5V <120W, 12V: <288W, 24V: <576W



4.Model:YS-SK85-05

RF Wireless RGB + CCT Touch music controller



1. Start the key
2. Static color
3. Music mode
4. Dynamic mode
- 5, the RGB touch ring
- 6, brightness / speed / music plus
- 7, brightness / speed / music reduction

1	Red gradient	15	Red jump	28	Red flash	Gradient music
2	Green gradient	16	Green jump	29	Green flash	pop music
3	Blue gradient	17	Blue jump	30	Blue flash	Tender music
4	Yellow gradient	18	Yellow jump	31	Yellow flash	Flash music



5	Purple gradient	19	Purple jump	32	Purple flash	
6	Cyan gradient	20	Cyan jump	33	Cyan flash	
7	White gradient	21	White jump	34	White flash	
8	W gradual change	22	W saltus step	35	W stroboflash	
9	C gradual change	23	C saltus step	36	C stroboflash	
10	W-C gradual change	24	W-C saltus step	37	W-C stroboflash	
11	W+C gradual change	25	W+C saltus step	38	W+C stroboflash	
12	Three color gradient	26	Three color jump change	39	Three color flash	
13	Seven color gradient	27	Seven color jump change	40	Seven color flash	
14	Full color gradient					

Performance Parameter

- Operating temperature: -20-60°C
- Power supply voltage: DC5V-24V
- Output: 4.8A * 5ch high power
- Connection mode: Gongyang
- Size of the controller: L85 * W45 * H23mm
- Remote control size: L113*W56*H22.5mm
- Plastic suction packaging size: L215 * W132 * H3mm
- Net weight: 95g
- Gross weight: 120g
- Static power consumption: <1W
- Output current: <24A
- Output power: 5V <120W, 12V: <288W, 24V: <576W