


12V Digital RGBW LED Strip - 60LEDs/m

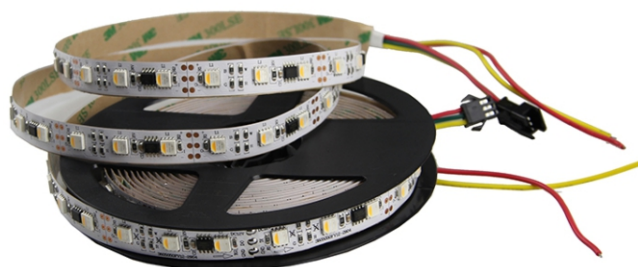

Product Description

This RGBW Digital led strip has 60LEDs & 20Pxels per meter

Each small section 50mm(3LEDs) can be cut off

DC12V constant voltage operation

The CCT of white can be customized as warm white or pure white or cool white

5m per reel, 3M tape is included

IP Rate can be IP20, IP64, IP65, IP67




Product Datasheet

Product Number	S012060CB4ST
Operating Voltage	DC12V
Power/M	19.2W
SMD Type	SMD 5050 4in1
LED Qty/M	60
Color	RGB+W:3000K/4000K/6000K
Pixel/M	20
Control	SPI-UCS2904
Wavelength	R:620-625 G:520-525 B:460-465nm
Luminance/M	R:117 G: 273 B: 59 W/WW : 337lm
Ra	80
Beam Angle	120°
Size (mm)	5000 * 12mm
IP Rate	IP20/IP64/IP65/IP67
Operation Temperature	- 25 ~ 60 °C
Material	FPC
Cutting Length	50mm


Remarks:

- 1.The above parameters were tested according to integrating sphere TM-30-15.
- 2.The output data is based on IP20 and one merter.
- 3.The data such as power etc, $\pm 15\%$ tolerance is normal.
- 4.IP protection process causes changes in size, CCT and luminous flux.


Outline Dimension unit mm

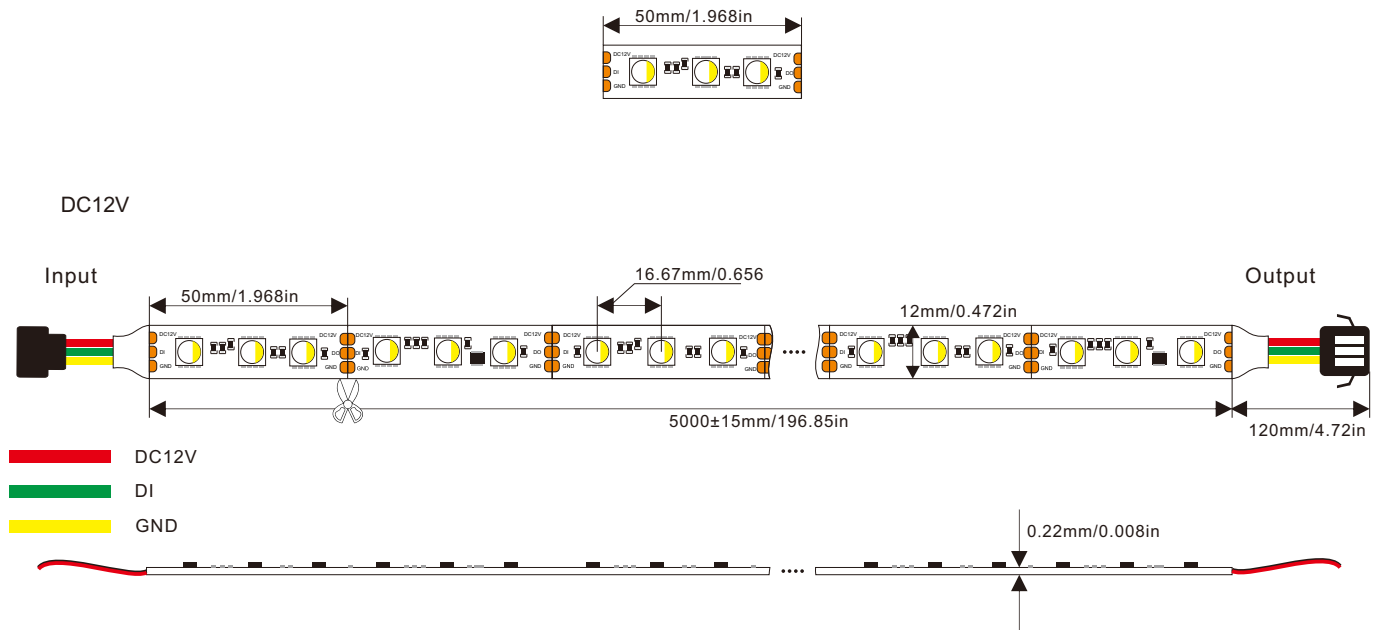

Wiring diagram

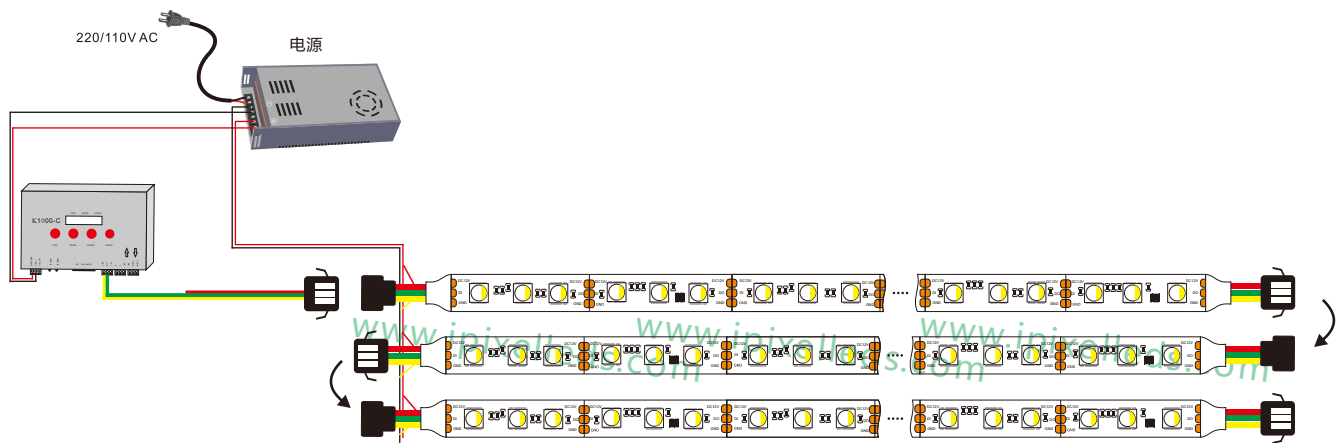

Strip IP Rate

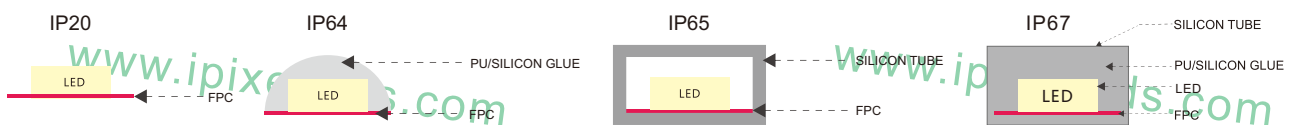

◆ Related products:




Power supply
LRS-350-24



SD card controller
K-1000C


◆ Installation method:




Can be cut




Tear off the 3M adhesive as need




Folding pads



Excessive bending




Bend to LED

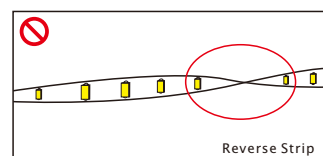


Reverse Strip

Distortion(Wrong)


◆ Product packaging



Reel



Antistatic bag



Note: The parameters are subject to change without notice!