


S shape 5050 RGBW led strip 48LEDs/M DC12V DC24V

◆ Product Description:



- S shape(zigzag) flex led strip with SMD5050 RGBW 48LEDs/m
- The biggest advantage is the S shape, which can be bend at any angle
- Only available in IP20 non-waterproof version
- Standard 5m per roll, the length also can be customized

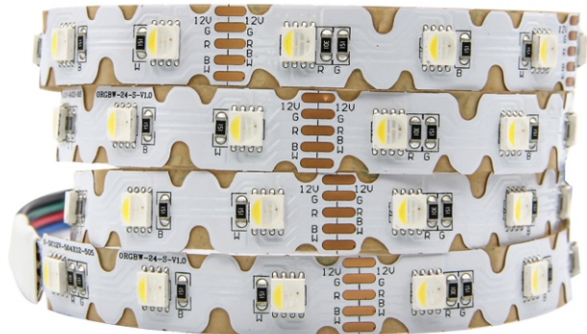


◆ Product Datasheet

Product Number	S012048CB4PZ(S)	S012048CC4PZ(S)
Operating Voltage	DC12V	DC24V
Power/m	15W	15W
SMD Type	SMD 5050	SMD 5050
LED Qty/m	48	48
Cutting Length	62.5mm/3LED	125mm/6LED
Color	RGBW:3000K/4000K/6500K	RGBW:3000K/4000K/6500K
Luminance/m	R:120 G:282 B:55 W:409lm	R:120 G:282 B:55 W:409lm
Wavelength	R:615-630 G:520-535 B:450-460nm	R:615-630 G:520-535 B:450-460nm
Control	PWM	PWM
Beam Angle	120°	120°
Size	5000x12mm	5000x12mm
IP Rate	IP20	IP20
Operation Temperature	- 25 ~ 60°C	- 25 ~ 60°C


Remarks:

- 1.The above parameters were tested according to integrating sphere TM-30-15.
- 2.The output data is based on IP20 and one merter.
- 3.The data such as power etc, $\pm 15\%$ tolerance is normal.
- 4.IP protection process causes changes in size, CCT and luminous flux.

Outline Dimension (unit:mm/in)

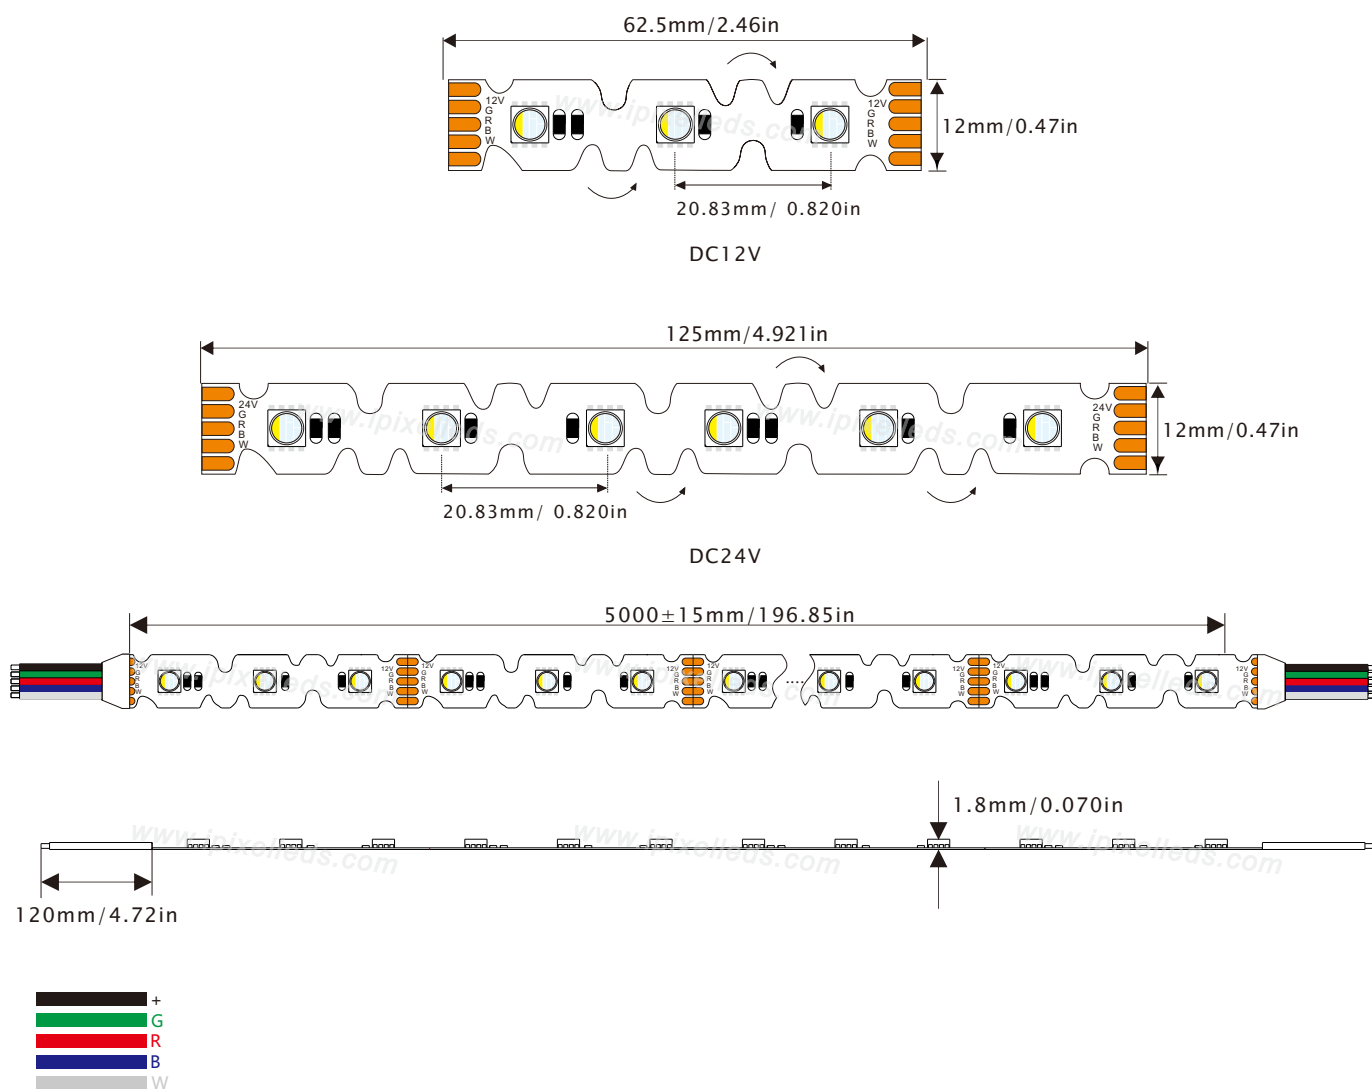

Wiring diagram

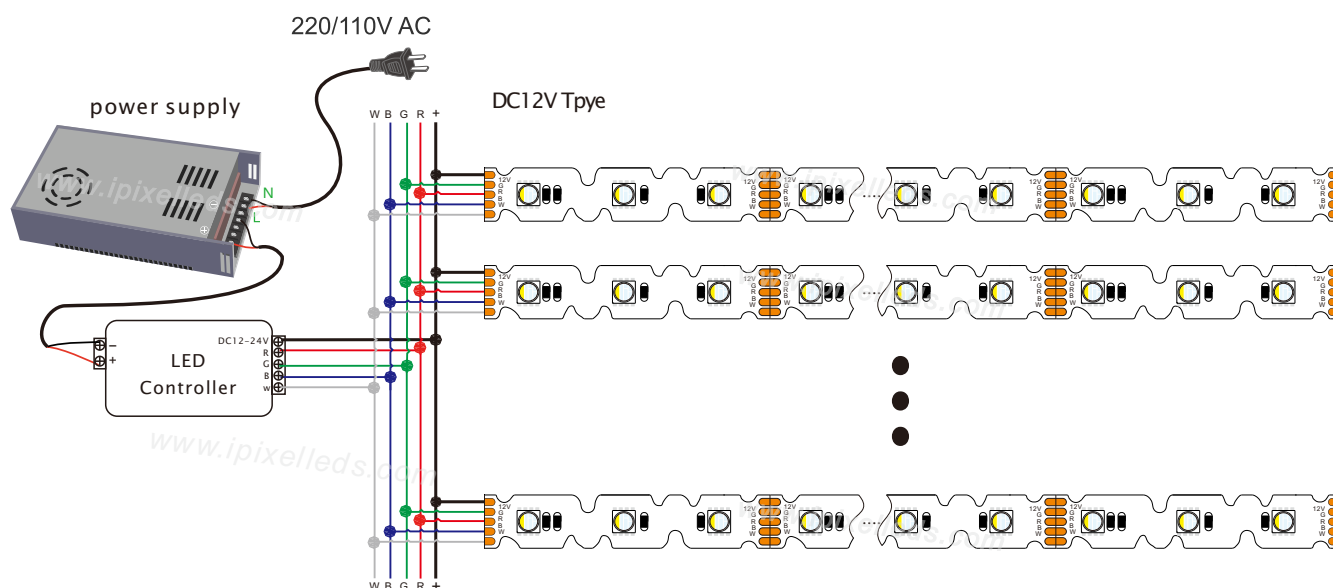

◆ IP Rating



◆ Related products




Power supply
LRS-350-12
LRS-350-24




XS-92-05


◆ Installation method:




Can be cut




Don't peel all 3M tape at once.



fold

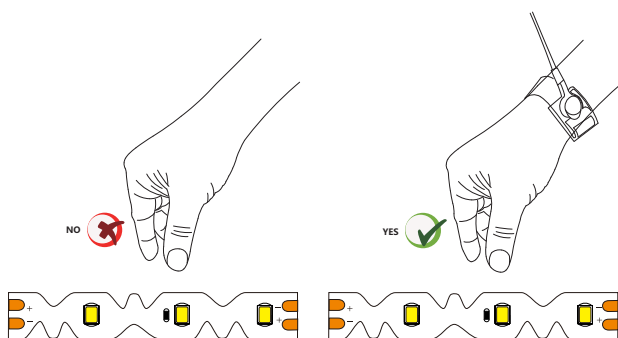

Pls wear the electrostatics ring for avoid ESD

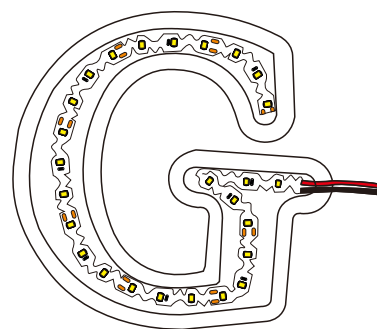

modeling


◆ Product packaging



Reel



Antistatic bag



Note: The parameters are subject to change without notice!

A1.25-03-07