

DC24V SMD5050 RGBW LED Strip 96LEDs/M

◆ Product Description:



Light source: 5050 Epistar SMD LEDs 4 in 1
 Operating voltage: DC24V
 Consumption watts per roll: 154W(Max)
 Entire roll LED quantity: 480pcs
 Wire length: 150mm (at both end)
 Packing: 5meter a roll
 Flexible white PCB
 3M tape attached on back side of strip (IP20)
 IP Rate: IP20, IP64, IP65, IP67




◆ Product Datasheet

Product Number	S012096CC4PZ
Operating Voltage	DC24V
Power/m	28W
SMD Type	SMD 5050
LED Qty/m	96
Cutting Length	62.5mm/6LED
Color	RGBW:3000K/4000K/65000K
Luminance/m	R:188 G:509 B:104 W: 665lm
Wavelength	R:620-625 G: 520-525 B: 460-465nm
Material	FPC
Control	PWM
Beam Angle	120°
Size (mm)	5000x12mm
IP Rating	IP20/IP64/IP65/IP67
Operation Temperature	- 25 ~ 60°C


Remarks:

- 1.The above parameters were tested according to integrating sphere TM-30-15.
- 2.The output data is based on IP20 and one merter.
- 3.The data such as power etc, $\pm 15\%$ tolerance is normal.
- 4.IP protection process causes changes in size, CCT and luminous flux.

Outline Dimension(unit:mm/in)

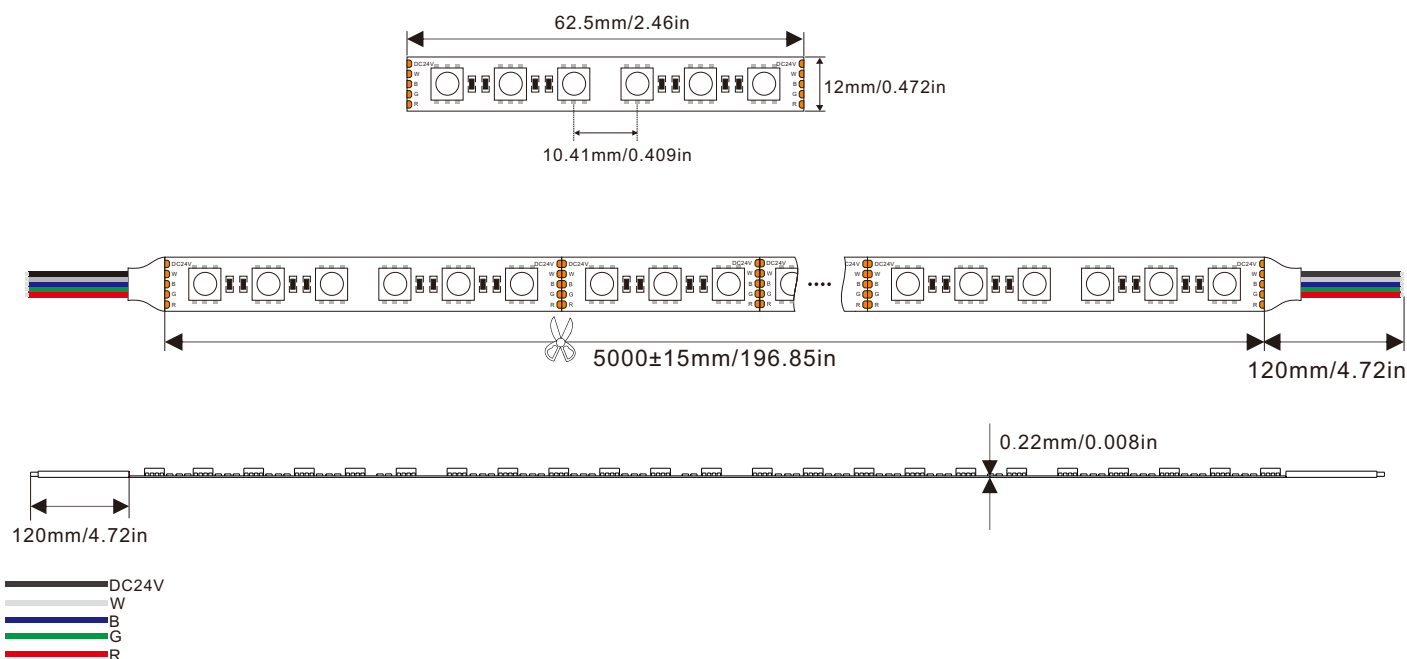

Wiring diagram

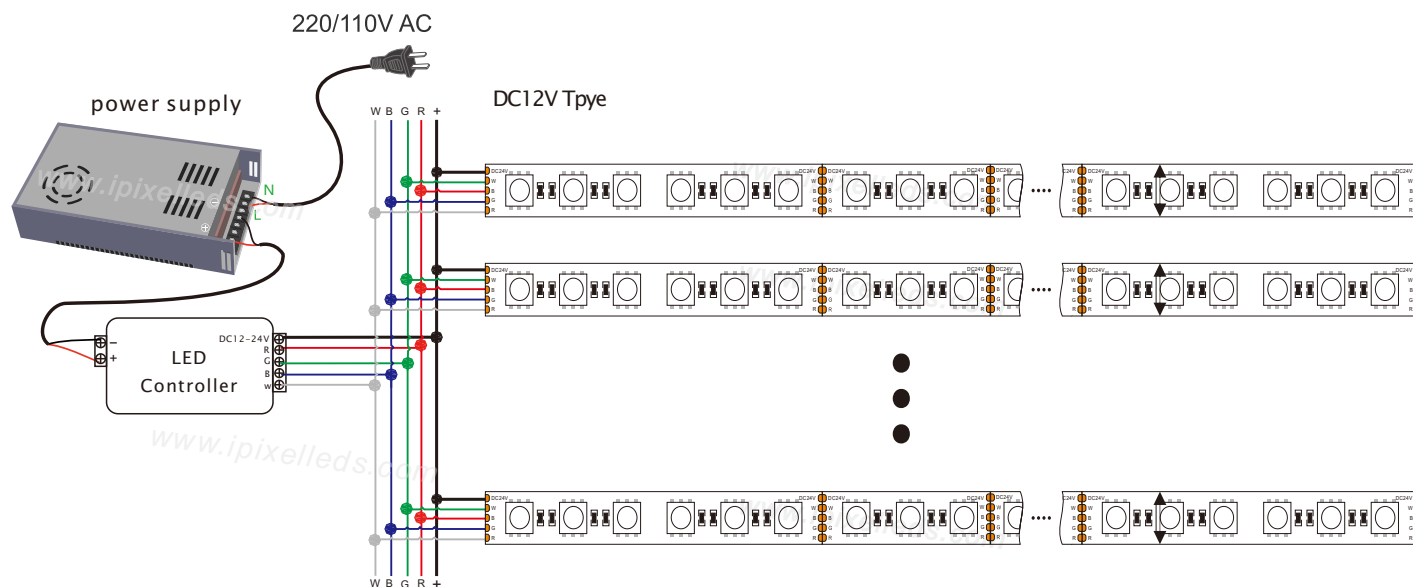

IP Rating



◆ Related products:




Power supply
LRS-350-24



dimmer
XS-86-03


◆ Installation method:




Can be cut




Tear off the 3M adhesive as need




Folding pads



Excessive bending



Bend to LED

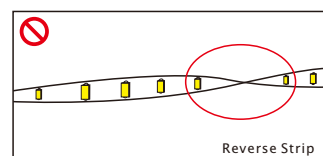


Reverse Strip

Distortion(Wrong)


◆ Product packaging



Reel



Antistatic bag



Note: The parameters are subject to change without notice!

A1.25-03-04