

2 wires CCT COB LED strip 640LEDs/m



◆ Product Description

- High density, the light is even and soft
- High efficiency, remarkable energy saving effect
- Double layer PCB, balancing voltage drop, heat dissipation and flexibility.
- Chip longitudinal distribution, high reliability;
- Dual white design, color changing from 2700K to 6500K.
- SDCM is less than 5 steps
- Standard 5M/roll, length can be customized




◆ Product Datasheet

Product Number	S008640ZB2PZ	S008640ZC2PZ
Operating Voltage	DC12V	DC24V
Power/m	8W (MAX)	8W (MAX)
SMD Type	COB	COB
LED Qty/m	640	640
Cutting Length	25mm	50mm
Color	2700K+6500K	2700K+6500K
Luminance/m	W: 620 C: 730lm	W: 620 C: 730lm
Ra	90	90
Beam Angle	180°	180°
Size (mm)	5000x8mm	5000x8mm
IP Rate	IP20/IP65	IP20/IP65
Operation Temperature	- 25 ~ 60°C	- 25 ~ 60°C


Remarks:

- 1.The above parameters were tested according to integrating sphere TM-30-15.
- 2.The output data is based on IP20 and one merter.
- 3.The data such as power etc, $\pm 15\%$ tolerance is normal.
- 4.IP protection process causes changes in size, CCT and luminous flux.

Outline Dimension (unit: mm/in)

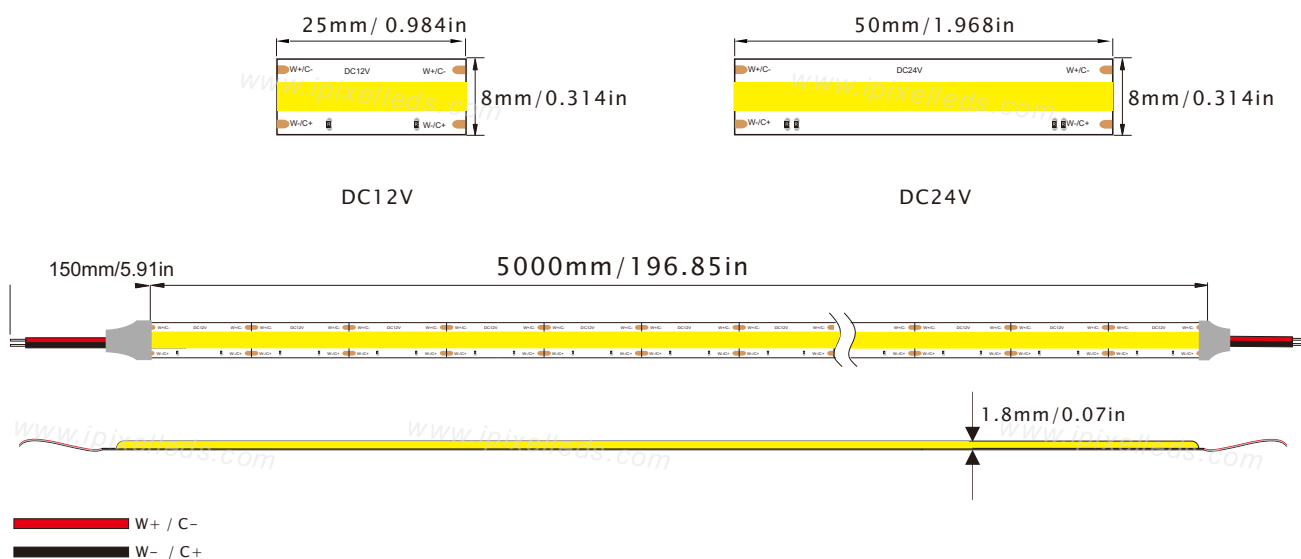

Wiring diagram

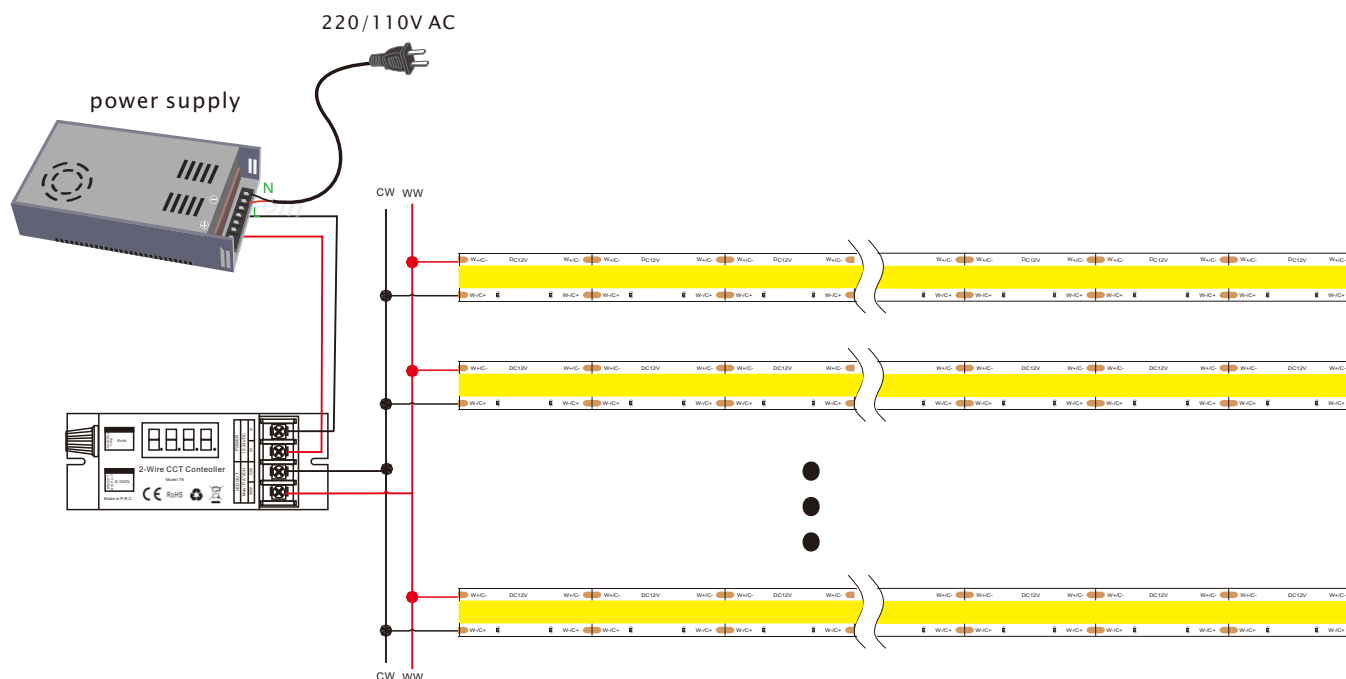

IP Rating



◆ Related products




Power supply
LRS-350-12
LRS-350-24



Alum profile
LL1605





T7 (linked to Rc)







Connector
O2P-10-L
OB2P-10

◆ Schematic diagram of maximum bending prevention

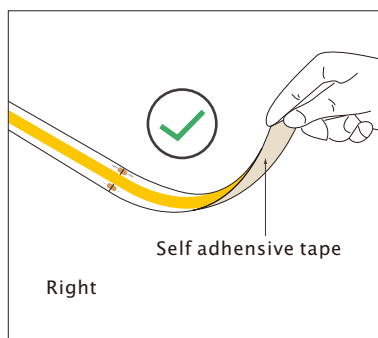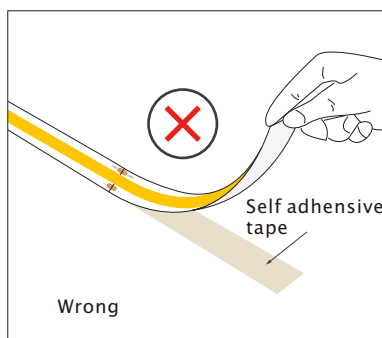


If the led strip needs to be torn up, please make sure that the self adhesive tape is torn with the led strip, otherwise the led strip will be damaged

When install the led strip, please note the installation technique. The led strip can be bent, but not distorted, as shown below.



Distortion(Wrong)

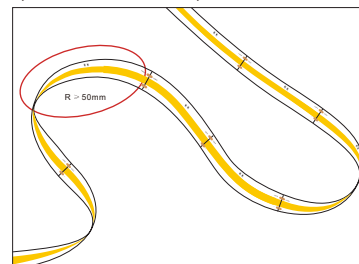

Bend(Right)

➤ LED strips are low voltage products, you must use the power supply (transformer). Please don't connect the LED strip directly to the AC110V or AC220V, otherwise it will burn out the LED strips.

➤ Clean up the installation surface, it will ensure the reliability of the adhesive. The electrical connection process must be operated by a professional person.


◆ Product packaging



Reel



Antistatic bag



Note: The parameters are subject to change without notice!

A1.24-05-13