

4mm Sk6812 LED Strip-60leds



◆ Product Description:

Control IC included, supporting numerous color-change effects.

Pcontrol by SD controller, Arduino, DMX512, Artnet.

Flexible PCB 5V low voltage input.

PCB Color: White.

Absolutely addressable, each IC built inside RGB LED.

1M per roll, Customer's size available also.




◆ Product Datasheet

Product Number	S004060DA3SA1
Operating Voltage	DC5V
Power/m	12W
SMD Type	SMD 3535
LED Qty/m	60
Cutting Length	16.66mm/1LED
Color	RGB
Luminance/m	R:61 G:172 B:40lm
Wavelength	R:620-625 G:520-525 B:460-465nm
Pixel/M	60
Material	FPC
Control	SPI/SK6812
Beam Angle	120°
Size (mm)	1000x4mm
IP Rating	IP20/IP65
Operation Temperature	- 25 ~ 60°C


Remarks:

- 1.The above parameters were tested according to integrating sphere TM-30-15.
- 2.The output data is based on IP20 and one merter.
- 3.The data such as power etc, ±15% tolerance is normal.
- 4.IP protection process causes changes in size, CCT and luminous flux.

Outline Dimension (unit:mm)

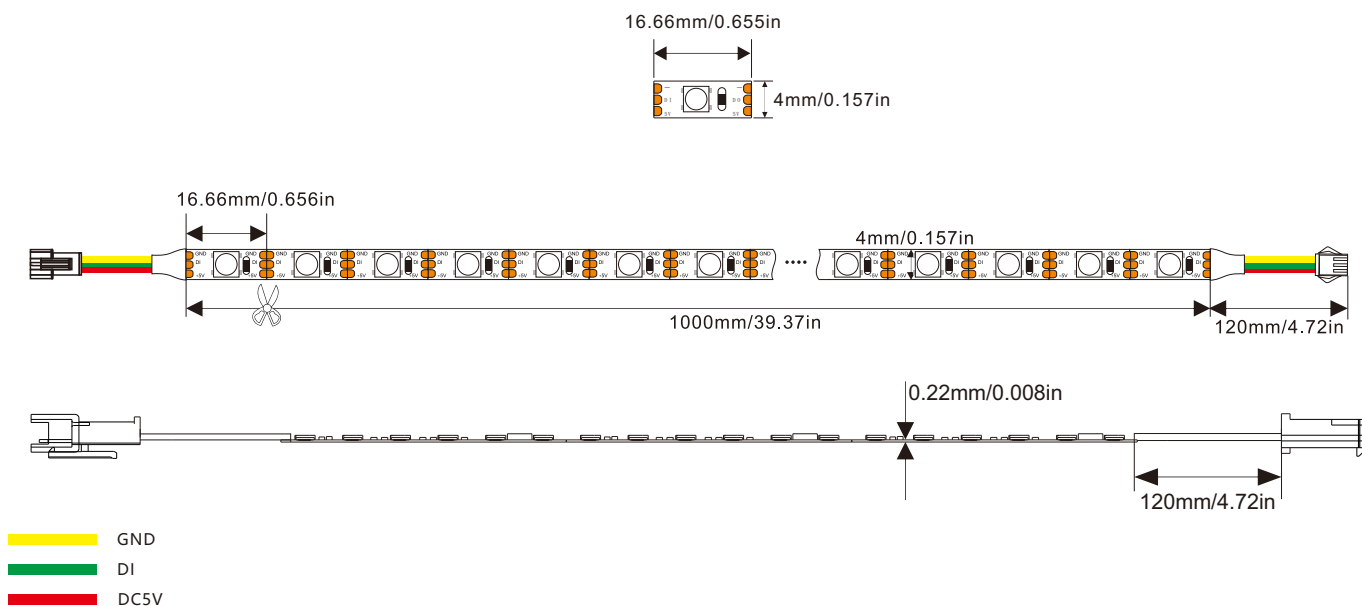

Wiring diagram

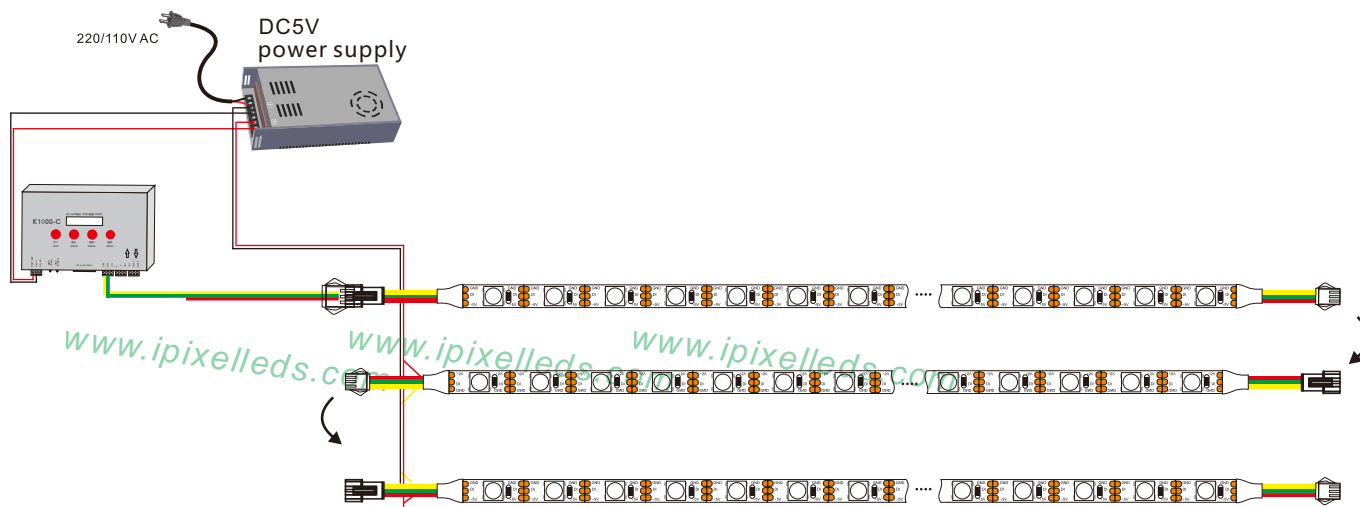

IP Rating



Note: The parameters are subject to change without notice!

◆ Related products:




Power supply
LRS-350-12



LED Controller
K-1000C


◆ Installation method:




Can be cut




Tear off the 3M adhesive as need




Folding pads



Excessive bending




Bend to LED

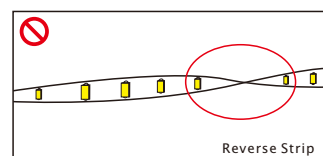


Reverse Strip

Distortion(Wrong)

◆ Product packaging



Reel



Antistatic bag

