


# 10\*20mm digital RGBW Side View

## LED Neon Flex DC12V

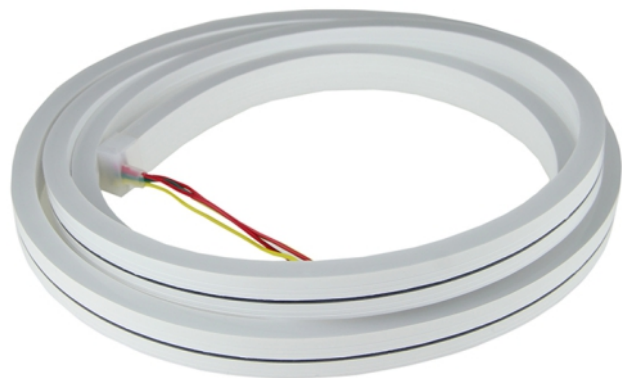

### Product Description:

Silicone Neon LED flex made by extrusion, white color body, diffused color on the top side without light spot, it's bendable within limited semidiameter, Anti-UV and salt it's a 4 in 1 RGBW digital LED tape inside each small section can be cut down refer to the black mark on the side of body the standard size is 5meters included 10pcs mounting clips JST connector output from each side of the body




### Product Datasheet

|                   |                                 |                       |                         |
|-------------------|---------------------------------|-----------------------|-------------------------|
| Product Number    | N010060CB4ST                    | Luminance/M           | R:70 G:121 B:27 W:215lm |
| Operating Voltage | DC12V                           | Ra                    | /                       |
| Power/M           | 19.2W                           | Beam Angle            | 120°                    |
| SMD Type          | SMD 5050                        | Size (mm)             | 5000x10x20mm            |
| LED Qty/M         | 60                              | IP Rate               | IP65                    |
| Color             | RGB+W:3000K/4000K/6500K         | Operation Temperature | - 25 ~ 60 °C            |
| Pixel/M           | 20                              | Material              | Silicone                |
| Control           | SPI-UCS2904                     | Cutting Length        | 50mm                    |
| Wavelength        | R:620-625 G:520-525 B:460-465nm | Net Weight/Roll       | 1.5Kg                   |

### Outline Dimension (unit:mm)

DC12V

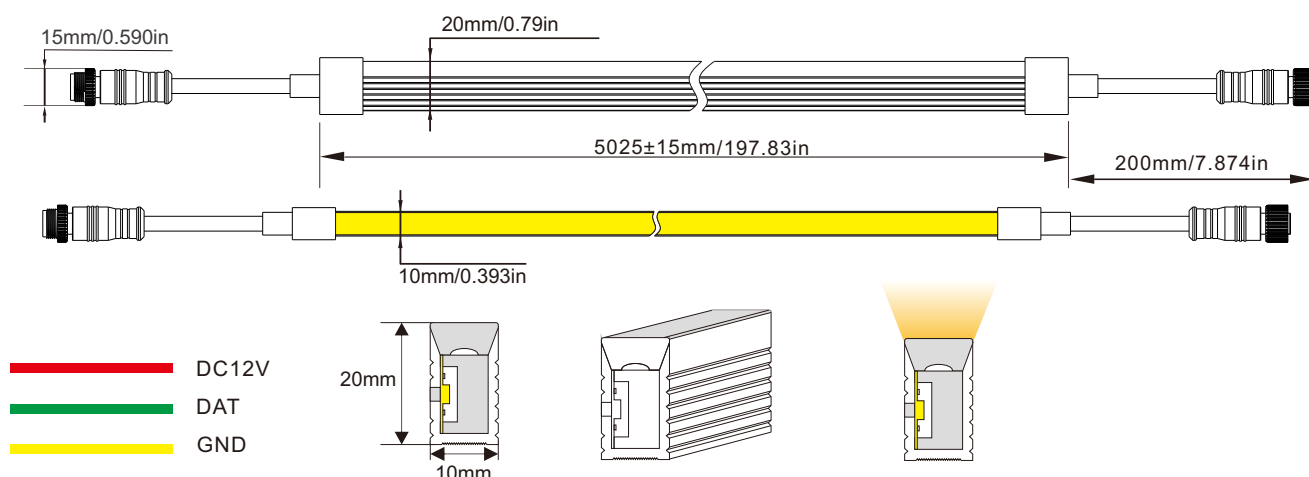


Note: Length tolerance applies. Actual product dimensions may vary.


◆ Order number

|       |             |           |      |                 |
|-------|-------------|-----------|------|-----------------|
| DC12V | RGB+W:3000K | White PCB | IP65 | N010060CB4ST/C1 |
| DC12V | RGB+W:4000K | White PCB | IP65 | N010060CB4ST/C2 |
| DC12V | RGB+W:6500K | White PCB | IP65 | N010060CB4ST/C3 |

◆ Wiring diagram


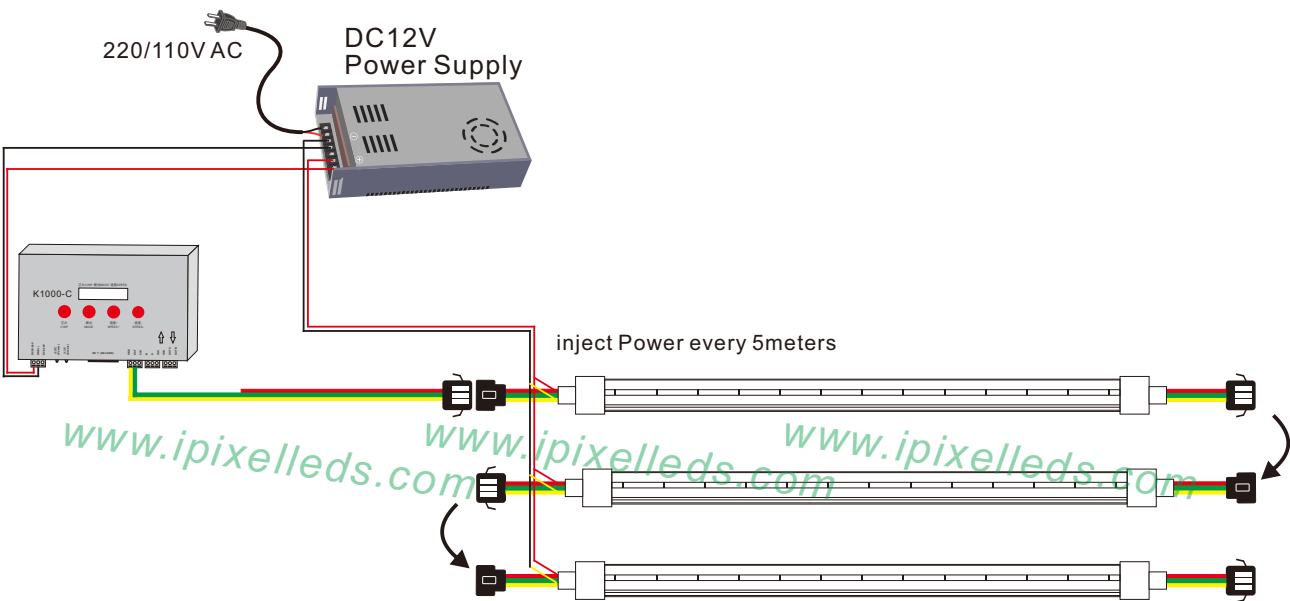


◆ Accessories

| Name    | Stainless steel clip                                                                            | The front cover                                                                                 | End cap                                                                              | Aluminum profile(1M/pcs)                                                              |
|---------|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Picture | standard<br> | standard<br> |  |  |
| Remarks | L30.2xW10.6xH14.6mm                                                                             |                                                                                                 |                                                                                      | W12xH22.5mm                                                                           |

Note: The parameters are subject to change without notice!

## ◆ Correct bending way

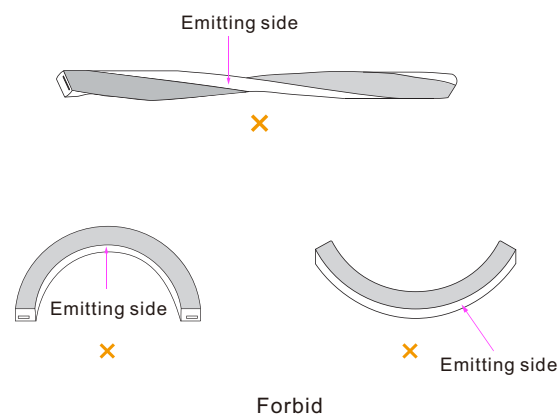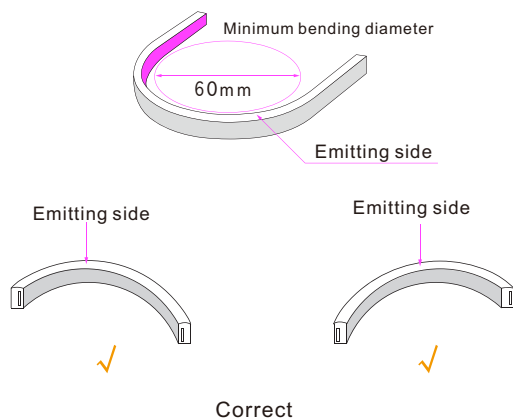



## ◆ Accessories



Stainless steel clip  
30.2x10.6x14.6mm(LxWxH)



Aluminum profile  
1000x10.6x14.6mm(LxWxH)

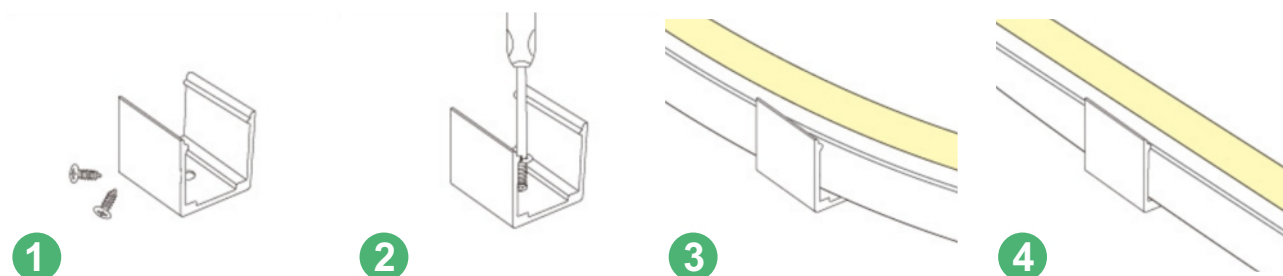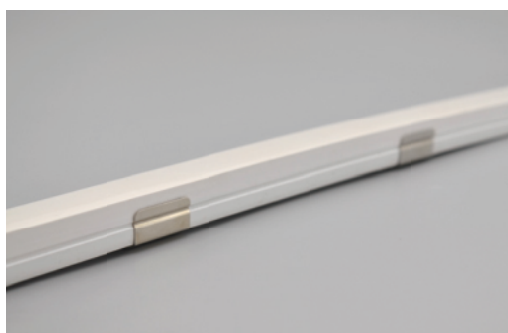

Note: The parameters are subject to change without notice!